

dPOFLEX® 高精度灌装型蠕动泵泵头


PFH01, PFH02

PUMP HEADS




- 体积小, 结构紧凑
- 全金属泵头, 外壳采用阳极铝材质
- 微小流量高精度灌装应用, 装量低至30ul(精度优于1%)
- 相位补偿设计, 降低脉动, 提高灌装精度


0.51KG

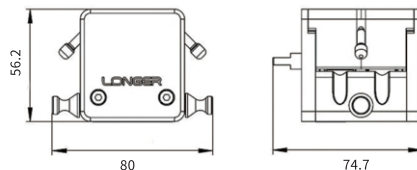


1.26KG

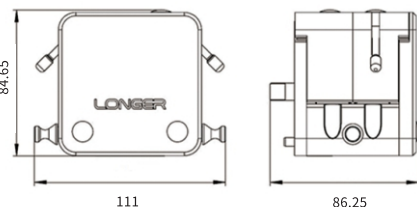

微升泵头PFH01灌装能力曲线表

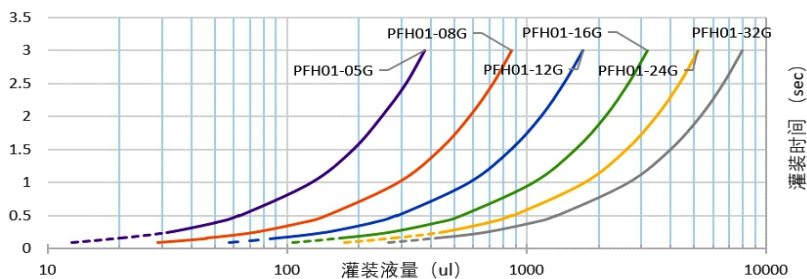

毫升泵头PFH02灌装能力曲线表

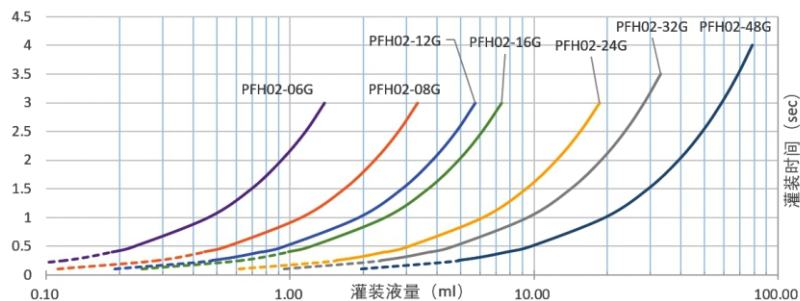

配备灌装平台、沉头、软管组件等配件, 构成完整灌装系统



泵头型号	滚轮材质	滚轮数量	转速 (rpm)	软管内径 (mm)	最大参考流量 (mL/min)	最小灌装量 (精度≤±1%)	最大秒灌装量	推荐灌装针内径 (mm)
PFH01	不锈钢	12	≤350	0.5	7	30uL	118uL	0.3或0.6
				0.8	17	42uL	269uL	0.6
				1.2	34	90uL	534uL	1
				1.6	63	132uL	987uL	1或0.6
				2.4	104	400uL	1.61mL	1.6
				3.2	159	760uL	2.47mL	1.6或3.2
PFH02	不锈钢	8	≤450	0.6	27	0.2mL	0.42mL	0.6
				0.8	66	0.4mL	1.03mL	0.6
				1.2	114	0.5mL	1.78mL	1
				1.6	147	0.8mL	2.29mL	1或1.6
				2.4	371	1.16mL	5.77mL	1.6
				3.2	566	2.15mL	8.80mL	1.6或3.2
				4.8	1178	3mL	18.28mL	3.2或4.5